

連接頭密封保护盒 Sealing Housing for Connecting



安全 • 经济 • 省时

- 现场安装，不需任何辅助工具
- 防水标准符合 IP68，防紫外線，適用環境溫度 - 30°C 到 60°C
- 安装极为容易，< 30 秒 / 1 个人
- 可重复使用
- 取代传统的费时费料的用防水胶带，絕缘胶带保护的方法



Safe • Economic • Time-saving

- Field proven
- Water tightness according IP68, UV resistant, reliable protection over a wide temperature range - 30°C to 60°C
- Easy and time saving installation , < 30sec. / person
- Reusable
- Replace the traditional protection method which use watertight tape, insulating tape

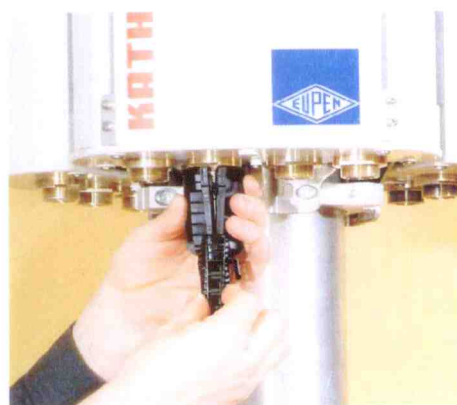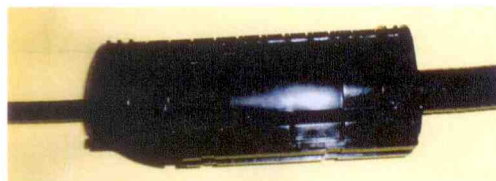

编号 Type No.	说明 Description
SH12-78	7/8"与 1/2" 电缆连接 Cable connection between 7/8" and 1/2"
SH12-114	1 1/4"与 1/2" 电缆连接 Cable connection between 1 1/4" and 1/2"
SH12-158	1 5/8"与 1/2" 电缆连接 Cable connection between 1 5/8" and 1/2"
SH12-ANT-TMA	天線或塔放 DIN 接口与 1/2" 跳線连接 1/2" jumper connecting between jumper and antenna or TMA



千乘科技(深圳)有限公司
QIANCHENG TECHNOLOGY (S.Z.) CO., LTD.
深圳市福田区保税区红花路国际商贸中心 4A 楼 208 号
Tel: 86 - 755 - 83593025 Fax: 86 - 755 - 83593027
Email: etcsz@public.szptt.net.cn

深圳千乘电信器材有限公司
SHENZHEN QIANCHENG TELECOM EQUIPMENT CO., LTD.
深圳市福田区车公庙工业区 211 栋 7 楼西
Tel: 86 - 755 - 83429265 Fax: 86 - 755 - 83429267